

TM TECHNOLOGIE
emergency & evacuation lighting



IP 20



850 °C




210 ÷ 250 V AC
50 / 60 Hz
186 ÷ 254 V DC





TM.ONTEC G



A, B

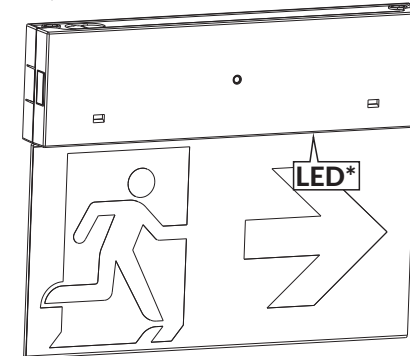

C

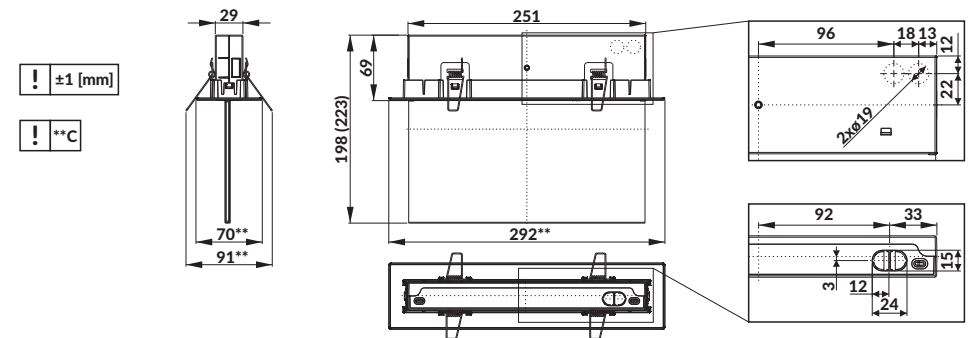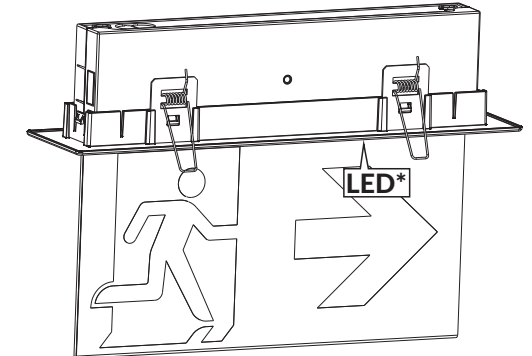

1

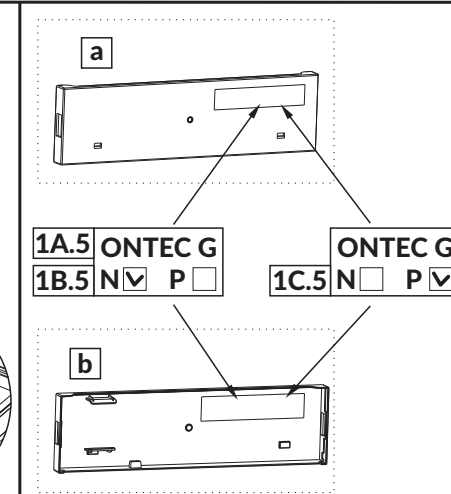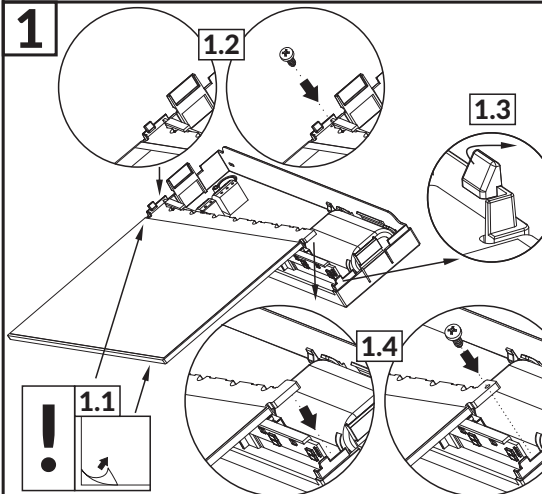

3.12 1.2 ➔ 1.3 ➔ 1.4

3.13 1.8a*(1.8b*) ➔ 1.10

4


*ST / AT / DATA / DATA 2 / DALI

4.1 3.1 ➔ 3.2 ➔ 3.3a*(3.3b*)


LiFePO4/C

4.3


4.2

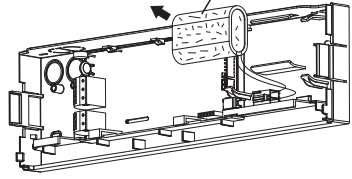

4.4




4.5

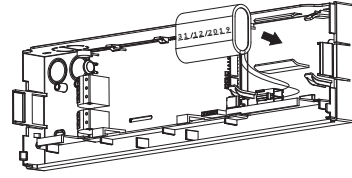


Ni-Cd HT 3.6V/0.8Ah

4.3

4.2




4.6

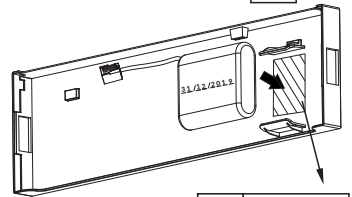

4.5

4.7 1.8a*(1.8b*) ➔ 1.10


ONTEC G E1B / E1E / E1P
t_c 95°C



ONTEC G E1A / E1U
t_c 80°C



ONTEC G CBA
t_c 95°C



! CBA = CB2



